


VH27 SERIES

AUTOMATIC FLOAT TYPE VENT

For use on Hydronic Systems

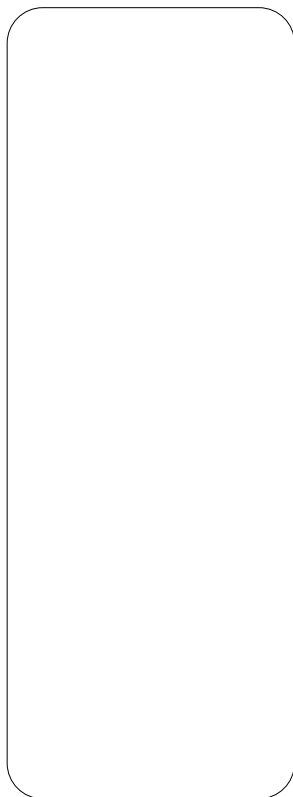

VH27 SERIES

INSTALLATION INSTRUCTIONS

Install in a vertical position. Hand tighten. If required, valve cap can be used for positive shut-off. Loosen cap 1-2 turns for normal automatic operation.

SPECIFICATIONS

MATERIAL BRASS
 MAXIMUM PRESSURE RATING 150 PSI
 ALLOWABLE TEMPERATURE RANGE
 FAHRENHEIT 40° - 240°
 CELCIUS 4° - 115°

BENEFITS & SPECIAL FEATURES

- Small and versatile. Use on radiators or convectors.
- Fits neatly within Hydronic baseboard enclosures.
- Quick response for rapid air elimination.
- Can be used as main system air vent on boiler.
- 18 month limited warranty.
- For hot and chilled water.

ORDERING INFORMATION

